



Features

MORE FLEXIBILITY: It adopts non-directional wireless encoding technology, allowing independent control without mutual interference, and can be flexibly configured in quantity and in operating modes.

WIDELY APPLICATION: Be used in industrial control and security fields, such as light, motor, remote controller, wireless security alarm, wireless door alarm, wireless controller, etc.

EXCELLENT PERFORMANCE: The OMRON relay with 10A switching capacity provides an excellent switching performance.

Wiring Diagram

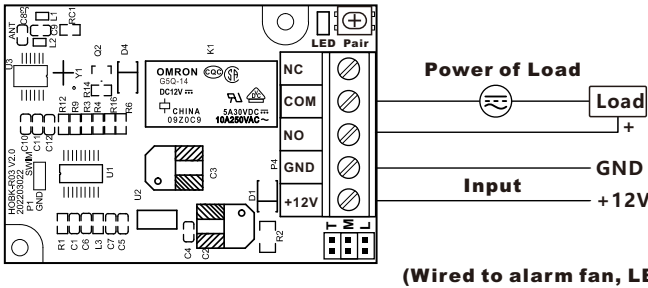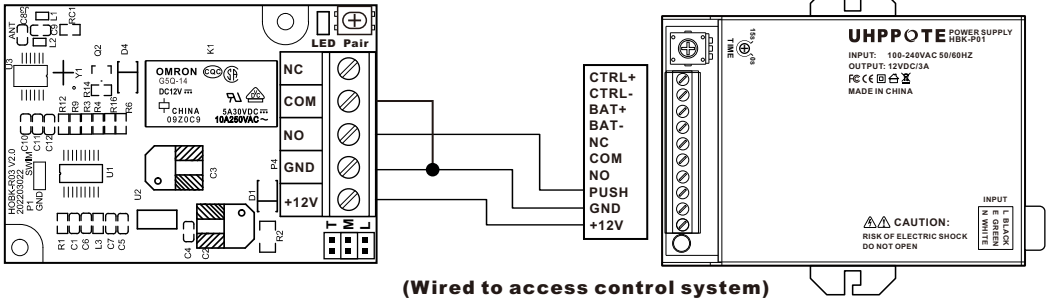

Operating Settings

Step 1. Unpairing


Press the **pair button** for 8 seconds until the green light turns off, indicating the unpairing is successful.

Step 2. Pair the remote control


Press the **pair button** once, the LED light flashes green, then press the button on the transmitter, the LED light flashes green three times to indicate the pairing is successful.

Step 3. Operating Mode Select



Momentary: Press and hold for ON
Toggle: Press ON, press again OFF
Latched: Press ON, press OFF.
Remarks: The operating mode is set by the jumper connector.

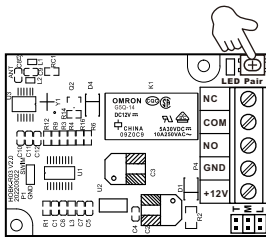

Step 1

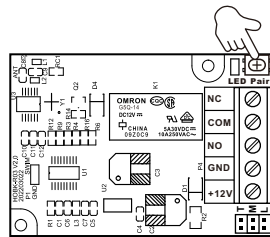

Step 2

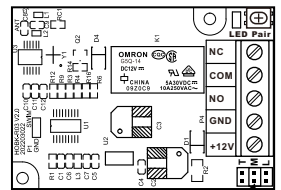

Step 3

Jumper Connector

Specifications

Operating Voltage	12VDC	Receiving Range	164ft (Open space)
Output Terminals	NO/NC/COM	Operating Mode	Momentary/Toggle/Latched
RF Frequency	433.92MHz	DC Encoding Type	Learning code
Operating Temperature	-22°F-140°F	Operating Humidity	10%-90%RH
RF Channel	One	Transmitter can be paired	40
Color of LED	Red, Green	Certifications	CE FCC
Dimensions	61x43x30mm / 2-13/32" x 1-11/16" x 1-3/16"		

Packing List

Name	Quantity	Remarks
Remote Control	1	
User Manual	1	English
Plastic Anchors	2	Ø6mmx25mm, used for fixing
Self - Tapping Screw	2	Ø4mmx25mm, used for fixing

FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-- Reorient or relocate the receiving antenna.-- Increase the separation between the equipment and receiver.

-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-- Consult the dealer or an experienced radio/TV technician for help. To maintain compliance with FCC's RF

Exposure guidelines, This equipment should be installed and operated with minimum distance between 20cm the radiator your body: Use only the supplied antenna.

